

# Datenblatt


## Nageldübel



**Baustoffe:** Vollziegel - Kalksandstein - Beton

**Material:** Polyamid PA6 (Nylon)

**Vorteile:** Schnelle und einfache Montage  
Durchsteckmontage

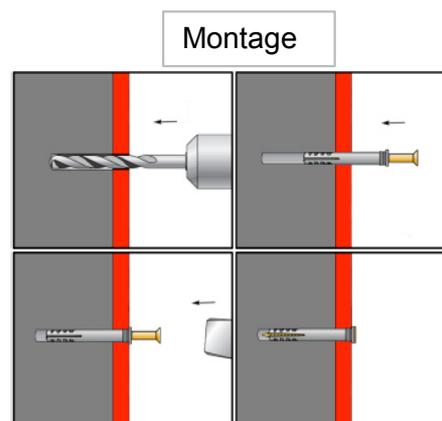

Größe	Bohrer Ø	Mind. Bohrtiefe	Dübel Länge	Schrauben Ø	Kragen Ø	Klemmstärke	Max. Lasten
6x35	6	40	35	3,8	10	5	1,92
6x40	6	45	40	3,8	10	10	1,92
6x45	6	50	45	3,8	10	15	1,92
6x55	6	60	55	3,8	10	25	1,92
6x60	6	65	60	3,8	10	30	1,92
6x70	6	75	70	3,8	10	40	1,92
8x45	8	50	45	4,8	11	5	2,60
8x60	8	65	60	4,8	11	20	2,60
8x75	8	80	75	4,8	11	35	2,60
8x80	8	85	80	4,8	11	40	2,60
8x100	8	105	100	4,8	11	60	2,60
8x120	8	125	120	4,8	11	80	2,60
8x135	8	140	135	4,8	11	95	2,60

Empfohlene Lasten in kN  
(1kN≈ 100 kg)